


General tolerances for plastics material		
WHEN IS NOT OTHERWISE SPECIFIED		±
from 1 to 5	0.1	
from 5 to 10	0.2	
from 10 to 50	0.3	
from 50 to 100	0.4	
from 100 to 200	0.6	
from 200 to 300	0.8	
from 300 to 500	1.5	
from 500 to 1000	2.0	

This drawing is an ACCUMA S.p.A. ownership. Without authorization it is forbidden to copy, to show to other people or to build the represented product. ACCUMA S.p.A. will reserve oneself to safeguard its rights according to law.

2 i

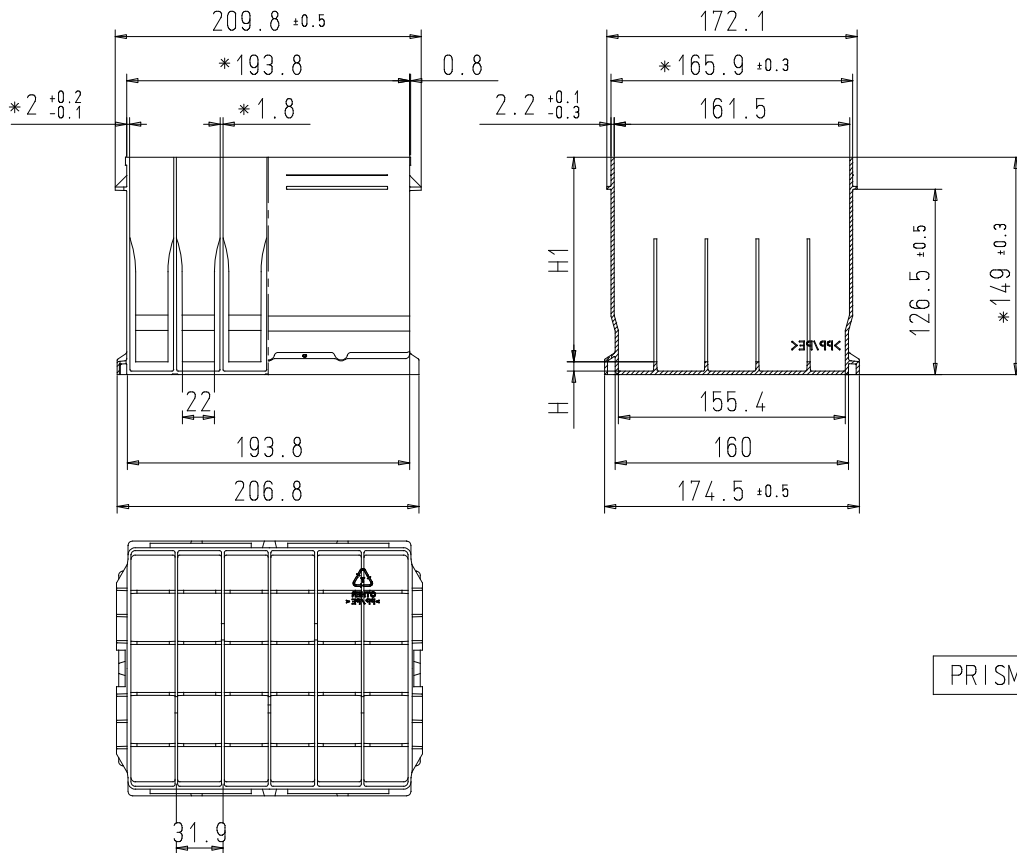

PRISMS

H	H1
0	146.6
6.5	140.1

TAB 902	LOWER PART POSSIBLE VERSIONS
102	L.S. 10.5 DIN 3+3 NOTCHES SAME LENGTH S.S. 10.5 DIN 3+3 NOTCHES
148	L.S. 10.5 DIN 5+5 NOTCHES SHORT+LONG S.S. 10.5 DIN 3+3 NOTCHES
202	L.S. 10.5 DIN 3+3 NOTCHES SAME LENGTH S.S. WITHOUT
248	L.S. 10.5 DIN 5+5 NOTCHES SHORT+LONG S.S. WITHOUT
284	L.S. 19 DIN 3+3 NOTCHES SHORT+LONG S.S. WITHOUT

TAB 903	UPPER PART POSSIBLE VERSIONS
018	WITH ROBOT RIBS VW HANDLES
019	WITH ROBOT RIBS WITHOUT HANDLES
027	WITH ROBOT RIBS (NOT INTERRUPTED)+L.L VW HANDLES

