




| General tolerances for plastics material |     |   |
|------------------------------------------|-----|---|
| WHEN IS NOT OTHERWISE SPECIFIED          |     | ± |
| from 1 to 5                              | 0.1 |   |
| from 5 to 10                             | 0.2 |   |
| from 10 to 50                            | 0.3 |   |
| from 50 to 100                           | 0.4 |   |
| from 100 to 200                          | 0.6 |   |
| from 200 to 300                          | 0.8 |   |
| from 300 to 500                          | 1.5 |   |
| from 500 to 1000                         | 2.0 |   |

This drawing is an ACCUMA S.p.A. ownership. Without authorization it is forbidden to copy, to show to other people or to build the represented product. ACCUMA S.p.A. will reserve oneself to safeguard its rights according to law.

2 1

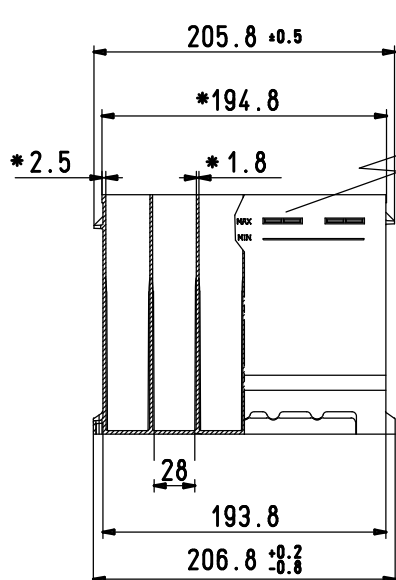

ALTERNATIVE VERSION  
ONLY TEXT \* MAX \*

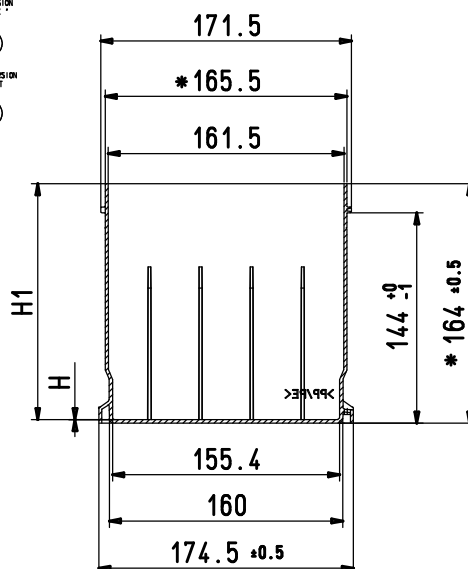

PRISMS

| H   | H1    |
|-----|-------|
| 0   | 161.6 |
| 6.6 | 155.0 |

| TAB<br>902 | LOWER PART<br>POSSIBLE VERSIONS                              |
|------------|--------------------------------------------------------------|
| 148        | L.S. 10.5DIN 5+5 NOTCHES SHORT+LONG S.S. 10.5DIN 3+3 NOTCHES |
| 248        | L.S. 10.5DIN 5+5 NOTCHES SHORT+LONG S.S. WITHOUT             |

| TAB<br>903 | UPPER PART<br>POSSIBLE VERSIONS                  |
|------------|--------------------------------------------------|
| 246        | WITH ROBOT RIBS 4+5 +ONE LEVEL LINE , VW HANDLES |

