
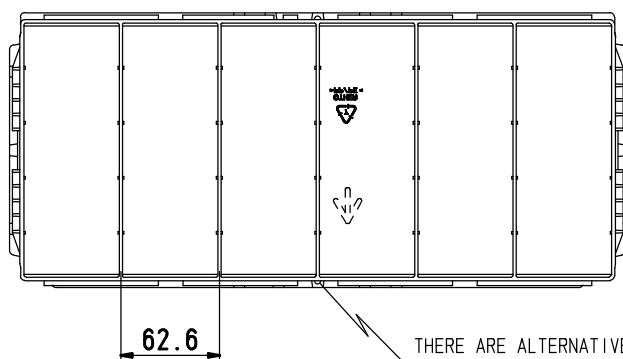
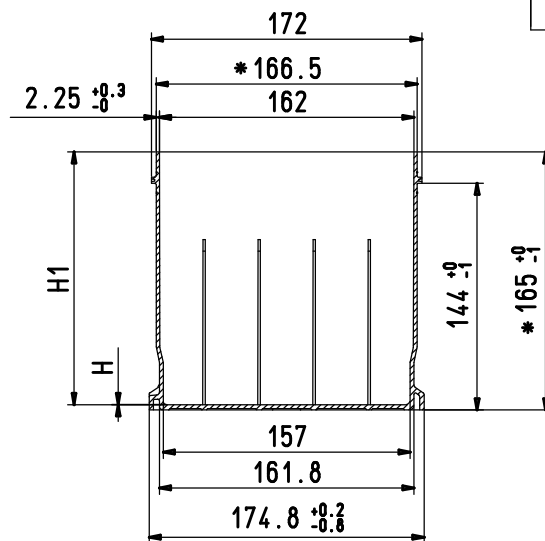



General tolerances for plastics material		
WHEN IS NOT OTHERWISE SPECIFIED		±
from 1 to 5	0.1	
from 5 to 10	0.2	
from 10 to 50	0.3	
from 50 to 100	0.4	
from 100 to 200	0.6	
from 200 to 300	0.8	
from 300 to 500	1.5	
from 500 to 1000	2.0	

This drawing is an ACCUMA S.p.A. ownership. Without authorization it is forbidden to copy, to show to other people or to build the represented product. ACCUMA S.p.A. will reserve oneself to safeguard its rights according to law.


PRISMS	H	H1
0		161.7

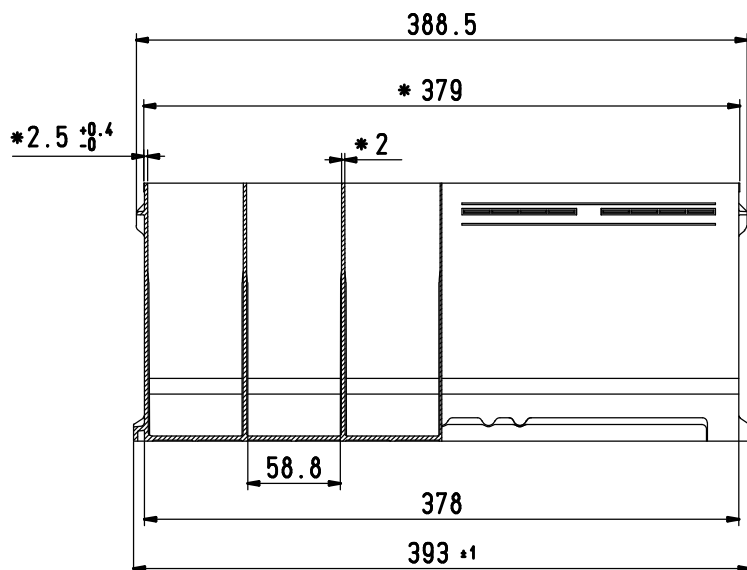

THERE ARE ALTERNATIVE VERSIONS WITH HOLES ON LONG SIDE HOLD DOWNS

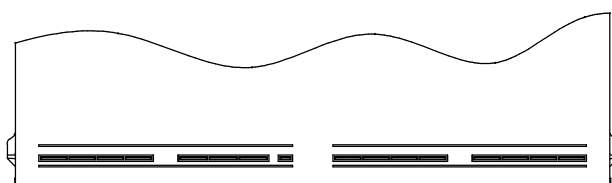




THERE ARE ALTERNATIVE VERSIONS WITH ONE LEVEL LINE AND 4+4 ROBOT NOTCHES FRONT AND BACK SIDE

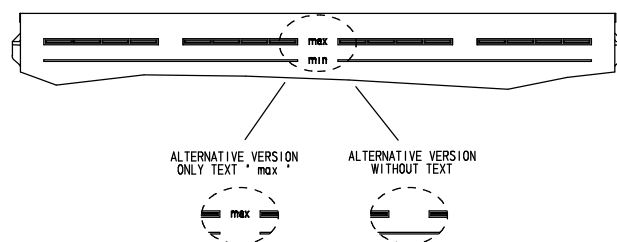

TAB	UPPER PART POSSIBLE VERSIONS
903	
046	WITH ROBOT RIBS (4+4 one level line), WITH VW TYPE HANDLES
225	WITH ROBOT RIBS (4+5 two level line), WITH VW TYPE HANDLES
057	WITH ROBOT RIBS (4+4 one level line), VW REINFORCED TYPEHANDLES
325	WITH ROBOT RIBS (4+5 two level line), WITH VW REINFORCED TYPE HANDLES

Code 325-225

TAB	LOWER PART POSSIBLE VERSIONS
902	
148	L.S. 10.5DIN 5+5 NOTCHES LONG-SHORT S.S. 10.5DIN 3+3 NOTCHES

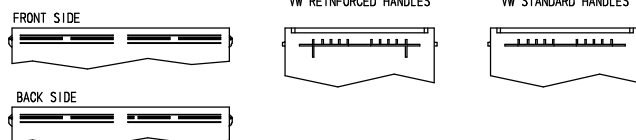

Code 046-057

