


General tolerances for plastics material		
WHEN IS NOT OTHERWISE SPECIFIED		±
from 1 to 5	0.1	
from 5 to 10	0.2	
from 10 to 50	0.3	
from 50 to 100	0.4	
from 100 to 200	0.6	
from 200 to 300	0.8	
from 300 to 500	1.5	
from 500 to 1000	2.0	


This drawing is an ACCUMA S.p.A. ownership. Without authorization it is forbidden to copy, to show to other people or to build the represented product. ACCUMA S.p.A. will reserve oneself to safeguard its rights according to law.

4 i





PEEPHOLE Ø20.4 IMB VERSION

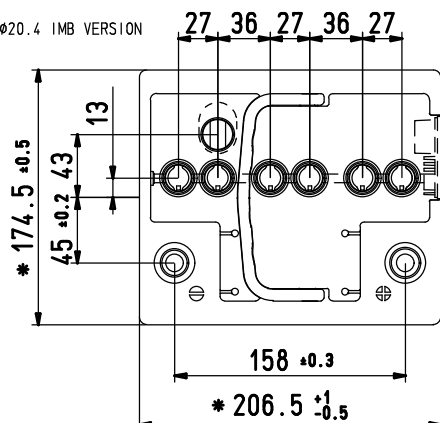

PEEPHOLE Ø20.4 IMBL VERSION

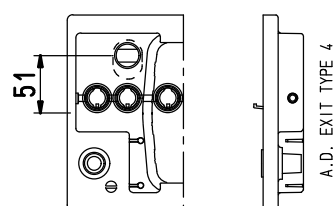


PEEPHOLE Ø20.4 IMB VERSION

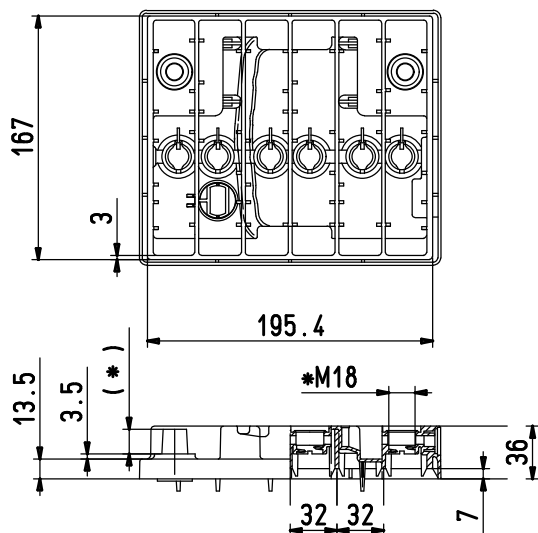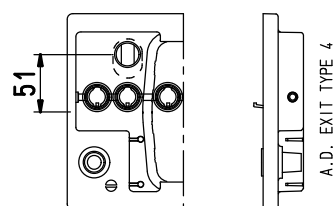


TAB	CODE FOR POSITIVE POSITION TYPE OF HANDLE AND VENT PLUG
905	
121	POL+RIGHT. SPECIAL HANDLES. V.P SINGLE THREAD
221	POL+LEFT. SPECIAL HANDLES. V.P SINGLE THREAD

121





221



TAB	POSTS PITCH, RESTS, SUPPORTS, PEEPHOLE AND VENT WELL CODE
906	
014	WITHOUT PEEPHOLE. A.D. EXIT TYPE 3
305	WITHOUT PEEPHOLE. A.D. EXIT TYPE 4
303	WITHOUT PEEPHOLE. A.D. EXIT SX TYPE 3 DX TYPE 4
301	WITHOUT PEEPHOLE. A.D. EXIT SX TYPE 4 DX TYPE 3
889	WITH PEEPHOLE Ø20.4IMB CELL2 +43 A.D. EXIT TYPE 3
318	WITH PEEPHOLE Ø20.4IMB CELL2 +43 A.D. EXIT TYPE 4
317	WITH PEEPHOLE Ø20.4IMB CELL2 +43 A.D. EXIT SX TYPE 3 DX TYPE 4
316	WITH PEEPHOLE Ø20.4IMB CELL2 +43 A.D. EXIT SX TYPE 4 DX TYPE 3
891	WITH PEEPHOLE Ø20.4IMBL CELL2 +51 A.D. EXIT TYPE 3
310	WITH PEEPHOLE Ø20.4IMBL CELL2 +51 A.D. EXIT TYPE 4
311	WITH PEEPHOLE Ø20.4IMBL CELL2 +51 A.D. EXIT SX TYPE 3 DX TYPE 4
312	WITH PEEPHOLE Ø20.4IMBL CELL2 +51 A.D. EXIT SX TYPE 4 DX TYPE 3
327	WITH PEEPHOLE Ø20.4IMB 90° CELL2 +51 A.D. EXIT SX TYPE4 DX TYPE3
328	WITH PEEPHOLE Ø20.4IMB 90° CELL2 +51 A.D. EXIT SX TYPE3 DX TYPE4
329	WITH PEEPHOLE Ø20.4IMB 90° CELL2 +51 A.D. EXIT TYPE4
886	WITH PEEPHOLE Ø20.4IMB 90° CELL2 +51 A.D. EXIT TYPE3

TAB	LEAD TERMINALS CODE
907	
149	Pos 1000.107 Neg 1000.108
150	Pos 1000.118 Neg 1000.119

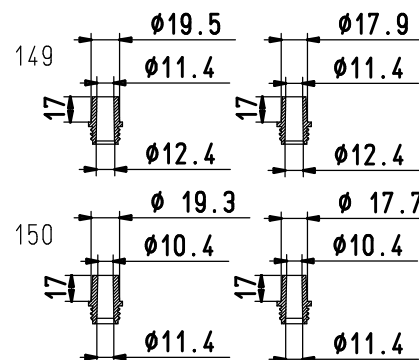

HOLES FOR MAGIC EYE

