

Code N° 2458

Rev. 12

Date 26-02-13

* SPECIAL CHARACTERISTICS

Table Date
26-12-13

General tolerances for plastics material		
WHEN IS NOT OTHERWISE SPECIFIED		$\pm$
from	1 to 5	0,1
from	5 to 10	0,2
from	10 to 50	0,3
from	50 to 100	0,4
from	100 to 200	0,6
from	200 to 300	0,8
from	300 to 500	1,5
from	500 to 1000	2,0






This drawing is an ACCUMA S.p.A. ownership. Without authorization it is forbidden to copy, to show to other people or to build the represented product. ACCUMA S.p.A. will reserv onself to safeguard its rights according to law.

4 i






PERIPHER Ø18.75 VERSION

PEEPHOLE Ø20,4 VERSION


STANDARD VERSION

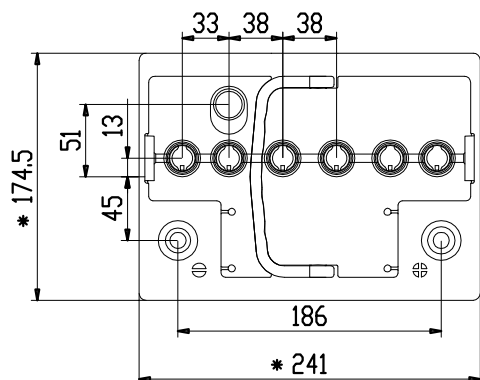

REFRHL F 019 IMBL VERSION

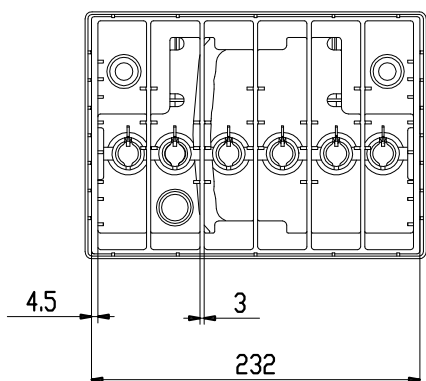


EXIT TYPE1

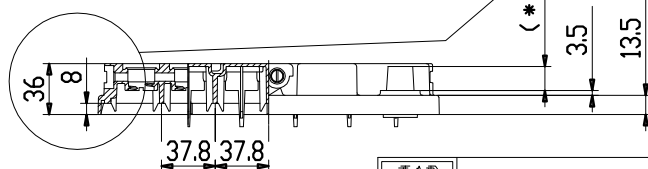


TAB 905	CODE FOR POSITIVE POSITION TYPE OF HANDLE AND VENT PLUG
121	POL+RIGHT, SPECIAL HANDLES, V.P SINGLE THREAD
??1	POL+LEFT , SPECIAL HANDLES, V.P SINGLE THREAD

TAB 906	POSTS PITCH,RESTS,SUPPORTS, PEEPHOLE AND VENT WELL CODE
008	WITHOUT PEEPHOLE, KAMINA STANDARD EXIT
010	WITHOUT PEEPHOLE, A.D. EXIT TYPE 1
598	WITH PEEPHOLE @18.75 cell2 +51 A.D. EXIT KAM STAND
599	WITH PEEPHOLE @20.4 cell2 +43 A.D. EXIT KAM STAND
698	WITH PEEPHOLE @18.75 cell2 +51 A.D. EXIT TYPE 1
699	WITH PEEPHOLE @20.4 cell2 +43 A.D. EXIT TYPE 1
323	WITH PEEPHOLE @19IMB/ cell3 -49 A.D. EXIT SX TYPE4 DX TYPE3
301	WITHOUT PEEPHOLE A.D. EXIT SX TYPE4 DX TYPE3
384	WITH PEEPHOLE @019/IMB/CELL 4/-49), A.D. EXIT TYPE 4
385	WITH PEEPHOLE @019/IMB/CELL 4/-49), A.D. EXIT SX TYPE 4 D
386	WITH PEEPHOLE @019/IMB/CELL 4/-49), A.D. EXIT SX TYPE 3 D
684	WITH PEEPHOLE @019/IMB/CELL 4/-49), A.D. EXIT TYPE 1
884	WITH PEEPHOLE @019/IMB/CELL 4/-49), A.D. EXIT TYPE 3

TAB		LEAD TERMINALS CODE	
907			
149	Pos 1000.107	Neg	1000.108
150	Pos 1000.118	Neg	1000.119
188	Pos 1000.240	Neg	1000.241
196	Pos 1000.261	Neg	1000.262



121



221

