
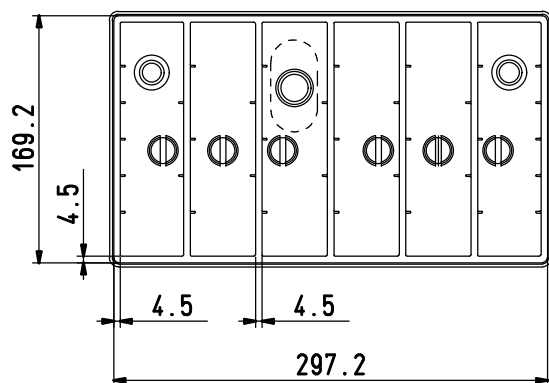
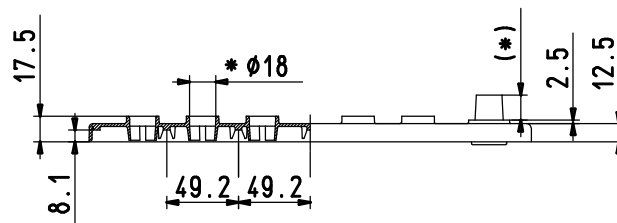



General tolerances for plastics material		
WHEN IS NOT OTHERWISE SPECIFIED		±
from 1 to 5	0.1	
from 5 to 10	0.2	
from 10 to 50	0.3	
from 50 to 100	0.4	
from 100 to 200	0.6	
from 200 to 300	0.8	
from 300 to 500	1.5	
from 500 to 1000	2.0	

This drawing is an ACCUMA S.p.A. ownership. Without authorization it is forbidden to copy, to show to other people or to build the represented product. ACCUMA S.p.A. will reserve oneself to safeguard its rights according to law.

2 i

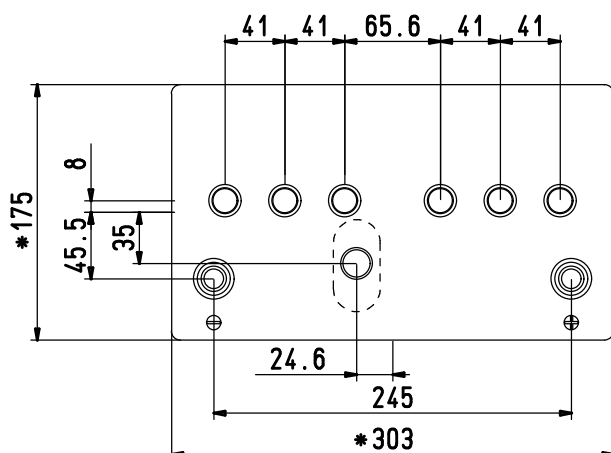

ALTERNATIVE PEEPHOLE POSITION VERSION

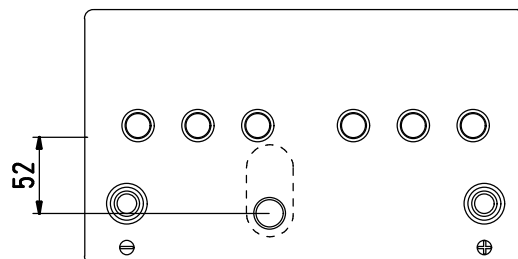

TAB	CODE FOR POSITIVE POSITION TYPE OF HANDLE AND VENT PLUG
103	POL+RIGHT, WITHOUT HANDLES, PUSH IN WITH CHIMNEY
203	POL+ LEFT, WITHOUT HANDLES, PUSH IN WITH CHIMNEY

TAB	POSTS PITCH, RESTS, SUPPORTS, PEEPHOLE AND VENT WELL CODE
002	FIXED-WITHOUT-WITHOUT-WITHOUT-WITHOUT-WITHOUT
110	FIXED-WITHOUT-WITHOUT-WITHOUT-Ø19CELL3-35-WITHOUT
112	FIXED-WITHOUT-WITHOUT-WITHOUT-Ø19CELL3-52-WITHOUT

TAB	LEAD TERMINALS CODE
012	Pos. 1000.072 Neg 1000.073
149	Pos. 1000.107 Neg 1000.108
169	Pos. 1000.145 Neg 1000.073
191	Pos. 1000.248 Neg 1000.249

